
Research Article

Development of an Intelligent Embedded Cyber Physical System Integrating Edge AI and Low Power Sensor Networks for Adaptive Environmental Monitoring and Robotic Control

Hayadi Hamuda ^{1*}, Sarah Anjani ², and Lailatun Adzimah ³

¹ Universitas Pamulang dosen02886@unpam.ac.id

² Universitas Pamulang dosen03445@unpam.ac.id

³ Universitas Pamulang dosen03380@unpam.ac.id

* Corresponding Author : Hayadi Hamuda

Abstract: Recent advancements in environmental monitoring and robotic control demand systems that are capable of real-time responsiveness, energy efficiency, and reliable operation in dynamic and resource-constrained environments. Conventional cloud-centric cyber-physical system (CPS) architectures often suffer from high latency, continuous connectivity dependency, and increased energy consumption, limiting their suitability for time-critical monitoring and adaptive control applications. To address these challenges, this study proposes an intelligent embedded cyber-physical system integrating Edge AI, low-power sensor networks, and adaptive robotic control for environmental monitoring. The proposed architecture relocates data processing and decision-making closer to the data source, enabling real-time inference, reduced communication overhead, and enhanced system autonomy. The research adopts a design-oriented experimental methodology involving system architecture design, lightweight Edge AI model development, prototype implementation, and performance evaluation under realistic operating conditions. Experimental results demonstrate that the proposed edge-based CPS significantly reduces end-to-end latency and energy consumption while maintaining acceptable inference accuracy compared to cloud-based processing. Furthermore, the system achieves improved communication efficiency and higher operational reliability, particularly under intermittent network connectivity. The findings highlight that embedding intelligence at the edge enables closed-loop sensing, decision-making, and actuation, which is essential for adaptive robotic control in environmental monitoring scenarios. This study contributes a system-level perspective on Edge AI-enabled CPS design and provides empirical evidence supporting the transition from cloud-centric architectures toward distributed, energy-aware, and resilient cyber-physical systems for real-time monitoring and control applications.

Keywords: Adaptive robotic control; Cyber-physical systems; Edge AI; Environmental monitoring; Low-power sensor networks.


Received: November 20, 2025

Revised: Desember 30, 2025

Accepted: January 14, 2026

Published: January 18, 2026

Curr. Ver.: January 20, 2026



Copyright: © 2025 by the authors.

Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY SA) license (<https://creativecommons.org/licenses/by-sa/4.0/>)

1. Introduction

Recent advances in environmental monitoring and robotic control systems have significantly transformed the way complex and dynamic environments are observed, analyzed, and managed. The increasing demand for real-time responsiveness, energy efficiency, and high system reliability has driven the integration of intelligent sensing, embedded computation, and autonomous robotic platforms. These requirements are particularly critical in applications such as environmental surveillance, smart cities, water quality assessment, wildlife conservation, and extreme-condition monitoring, where delayed

responses or system failures may lead to severe ecological or operational consequences [1]. One of the most prominent trends in modern environmental monitoring systems is the shift toward real-time data acquisition and processing at the edge. Embedded intelligence enables sensor nodes and robotic agents to perform local data analysis, reducing dependency on centralized cloud infrastructures and minimizing communication latency. Recent studies have demonstrated that edge-enabled robotic systems equipped with artificial intelligence (AI) can autonomously detect environmental anomalies, illegal activities, or hazardous conditions with high temporal accuracy [2], [3]. Wireless communication technologies such as LoRa further support seamless real-time data transmission over long distances while maintaining low power consumption, making them suitable for large-scale and remote deployments [4].

Energy efficiency represents another fundamental challenge in the deployment of long-term environmental monitoring and robotic control systems. Traditional battery-powered solutions often suffer from limited operational lifetimes, particularly in harsh or inaccessible environments. To address this limitation, recent research has explored self-powered and energy-harvesting systems that combine low-power electronics with renewable energy sources. For example, self-powered triboelectric nanosensors integrated with thermoelectric generator-powered robotic platforms have demonstrated continuous, real-time detection capabilities without reliance on external power supplies [5]. Additionally, the optimization of deep learning models for embedded devices has been shown to significantly reduce energy consumption while preserving inference accuracy, enabling sustainable AI-driven monitoring solutions [6]. Beyond real-time performance and energy efficiency, system reliability and resilience are essential for ensuring consistent operation in complex and extreme environments. Modern environmental monitoring platforms increasingly incorporate heterogeneous sensor arrays capable of measuring air quality, temperature, humidity, chemical pollutants, and biological indicators using electrochemical, optical, and metal-oxide sensing mechanisms [7]. Secure and robust data transmission has also gained attention, with emerging approaches integrating federated learning and cryptographic techniques, such as quantum key distribution, to protect sensitive operational data and enhance system trustworthiness [8]. Signal-resilient architectures employing radar-based perception and AI-driven IoT surveillance frameworks further improve system robustness under adverse environmental and communication conditions [9].

The convergence of these technological advancements has enabled a wide range of practical applications. Autonomous robotic systems have been successfully deployed for wildlife monitoring and animal identification in challenging terrains, leveraging computer vision and convolutional neural networks to achieve high detection accuracy [10]. In water resource management, automated sensing networks and robotic platforms have improved the efficiency and scalability of water quality assessment, supporting timely decision-making for environmental protection [11]. Similarly, smart city environmental monitoring systems integrate advanced sensors and data analytics to provide comprehensive situational awareness for urban planners and policymakers [7]. Despite these advances, challenges remain in achieving seamless integration between edge AI, low-power sensor networks, and adaptive robotic control within a unified cyber-physical framework. Issues related to scalability, interoperability, and adaptive decision-making under resource constraints continue to limit the broader adoption of such systems. Therefore, further research is required to develop intelligent embedded cyber-physical systems that combine real-time edge intelligence, energy-aware operation, and robust sensing to support adaptive environmental monitoring and reliable robotic control across diverse application domains.

Conventional cloud-based architectures have been widely adopted in cyber-physical and Internet of Things (IoT) ecosystems because they offer virtually elastic computing power and massive storage capacity to support large-scale data collection, analytics, and application services. In many deployments, sensor and actuator nodes transmit data to remote cloud data centers for processing, decision-making, and system-wide coordination. This model is attractive for centralized management and scalable computation; however, it also introduces fundamental limitations when cloud services are used to support time-critical and resource-constrained environments. A primary challenge of cloud-centric architectures is high latency, which becomes critical in latency-sensitive applications requiring near-instantaneous feedback and control loops. When data must travel over long network paths to reach centralized cloud

servers and return with a control decision, the end-to-end delay increases significantly. Such delays can be unacceptable for real-time use cases where milliseconds matter, including autonomous and safety-critical systems. Moreover, cloud reliance may lead to network congestion as the number of connected devices and the volume of transmitted data grow, further degrading system responsiveness. These limitations have been consistently identified in the literature as key reasons why traditional cloud computing alone is insufficient for real-time ubiquitous applications [12], [13].

In response to these shortcomings, fog computing has emerged as a complementary paradigm that extends cloud capabilities by bringing computation, storage, and networking closer to the data sources. Instead of sending all data to distant cloud servers, fog architectures distribute processing across intermediate nodes such as gateways, routers, micro data centers, or edge servers located nearer to sensor and actuator networks. This proximity reduces end-to-end latency and supports faster response times, making fog more suitable for real-time control and edge intelligence. Reviews and architectural studies highlight that fog computing can improve system performance by enabling local decision-making while maintaining interoperability with centralized cloud services for heavy analytics and long-term storage [12], [13]. Beyond latency, cloud-based systems also exhibit strong connectivity dependency, since they typically require continuous and stable internet connections to perform reliably. In real-world environments such as industrial sites, remote areas, disaster zones, or mobile deployments network availability is not always guaranteed. Intermittent connectivity can interrupt data transmission, delay analytics, and degrade control reliability, which is especially problematic for distributed cyber-physical systems that depend on continuous sensing-to-actuation cycles. Fog approaches reduce this dependency by enabling local processing and partial autonomy, allowing systems to continue functioning even when cloud connectivity becomes unstable or temporarily unavailable [12], [14].

Another important constraint is energy consumption, particularly for distributed sensor and actuator nodes. Cloud-centric designs often require continuous data transmission and frequent communication sessions, which can drain energy resources on low-power devices. Although cloud infrastructure itself may be energy-efficient at scale, the energy burden shifts to the network and the edge devices that must transmit data continuously. Fog computing addresses this issue by filtering, aggregating, and processing data closer to where it is generated, thereby reducing unnecessary transmissions and enabling more energy-aware resource management strategies in distributed infrastructures [12], [14]. Taken together, the limitations of conventional cloud architectures high latency, heavy reliance on continuous connectivity, and increased energy costs motivate the transition toward distributed paradigms such as fog computing. Current research continues to explore fog architectures, management mechanisms, and edge intelligence integration to enable scalable real-time data processing and dependable services in ubiquitous and industrial applications [13], [14]. Therefore, a clearer understanding of these constraints and the role of fog computing is essential for designing next-generation cyber-physical systems that demand real-time responsiveness, resilience, and energy efficiency.

2. Literature Review

Cyber Physical Systems: Concepts and Foundations

Cyber-Physical Systems (CPS) represent a paradigm in which physical processes are tightly integrated with computational intelligence and communication networks to enable real-time monitoring, control, and autonomous decision-making. CPS combine embedded software, networked computing infrastructures, sensors, and actuators to interact continuously with the physical environment. This tight integration allows CPS to perceive environmental states, analyze data, and execute control actions in a closed feedback loop [15].

The foundational characteristics of CPS include real-time responsiveness, adaptability, and bidirectional interaction between cyber and physical components. Unlike traditional embedded systems, CPS are designed to operate in dynamic and uncertain environments, requiring intelligent reasoning and adaptive control mechanisms. Their multidisciplinary nature blends domain-specific knowledge with computer science, control engineering, and

networking technologies [15], [16]. As a result, CPS have become a core technological backbone in modern industrial automation, smart infrastructure, and intelligent services.

Applications of Cyber Physical Systems

CPS technologies have been widely adopted across diverse application domains. In manufacturing and industrial automation, CPS enable smart factories through real-time process monitoring, predictive maintenance, and adaptive production control. In the energy sector, CPS form the basis of smart grids that balance supply and demand while ensuring operational stability. Transportation systems increasingly rely on CPS to support intelligent traffic management, autonomous vehicles, and safety-critical control functions [16].

Healthcare and agriculture are also prominent domains benefiting from CPS integration. In smart healthcare, CPS combined with IoT infrastructures enable continuous patient monitoring, remote diagnostics, and intelligent decision support, improving service quality and responsiveness [17]. Similarly, agricultural CPS applications support precision farming by integrating sensor data, environmental monitoring, and automated actuation to optimize resource usage and crop yields [15]. These applications demonstrate CPS's role as a unifying framework for intelligent, data-driven, and autonomous systems.

Embedded Intelligence in Cyber Physical Systems

Embedded intelligence is a defining feature that distinguishes modern CPS from conventional control systems. CPS are fundamentally built upon embedded systems that integrate computation and communication capabilities with physical resources under strict constraints on energy, latency, and reliability. Embedded intelligence refers to the incorporation of artificial intelligence (AI) techniques such as machine learning, neural networks, and computational intelligence within embedded CPS platforms to enhance autonomy and decision-making capabilities [18].

The integration of AI enables CPS to perform advanced functionalities, including predictive analytics, anomaly detection, fault diagnosis, and adaptive energy management. These intelligent mechanisms allow CPS to learn from historical and real-time data, improve performance over time, and respond proactively to changing environmental conditions [19]. Recent studies emphasize the growing role of edge intelligence, where computational intelligence is deployed closer to sensors and actuators to reduce latency and support real-time decision-making, particularly in transportation and industrial CPS [20].

Security, Resilience, and Interoperability Challenges

Despite their advantages, CPS face significant challenges related to security, resilience, and interoperability. The tight coupling of cyber and physical components exposes CPS to cyber-attacks that can disrupt physical processes and compromise safety. Research has increasingly focused on detecting, attributing, and mitigating cyber-attacks within CPS environments, particularly those integrated with IoT infrastructures [21]. Ensuring confidentiality, integrity, and availability of data remains a critical concern for large-scale CPS deployments.

Resilience is another key research area, as CPS must continue to operate reliably under disturbances, faults, or malicious attacks. Approaches combining detection, estimation, and control have been proposed to enhance CPS robustness and ensure stable operation in adversarial or uncertain conditions [22]. Interoperability further complicates CPS design, as heterogeneous devices, protocols, and platforms must seamlessly exchange information while meeting strict real-time constraints [23].

Integration with Emerging Computing Paradigms

The evolution of CPS is closely linked to their integration with emerging computing paradigms such as IoT, edge computing, fog computing, and cloud computing. These technologies enhance CPS scalability, flexibility, and intelligence by enabling distributed data

processing and resource management across multiple layers. Edge and fog computing, in particular, support real-time responsiveness by reducing communication delays and allowing localized decision-making [16], [20].

Cloud computing complements these paradigms by providing centralized analytics, long-term storage, and global system coordination. Together, this multi-layered computing architecture forms a cohesive ecosystem that supports intelligent CPS applications in smart cities, healthcare, and industrial automation [23]. Consequently, ongoing research continues to explore architectural models, security mechanisms, and embedded intelligence strategies to advance CPS toward more autonomous, resilient, and adaptive systems.

Edge AI for Monitoring and Adaptive Control

Conceptual Overview of Edge AI

Edge AI refers to the integration of edge computing and artificial intelligence (AI) to enable data processing, inference, and decision-making directly near the data source (e.g., sensors, cameras, wearables, industrial devices). This paradigm reduces reliance on centralized cloud infrastructures and supports real-time monitoring and adaptive control under strict constraints on latency, energy, and connectivity. In monitoring-control loops, edge-based inference is particularly valuable because it shortens the time between sensing, analytics, and actuation, improving responsiveness in dynamic environments [24]. Beyond real-time performance, Edge AI also provides practical benefits in resource efficiency and privacy, since sensitive data can be processed locally rather than transmitted continuously to remote servers [25].

Edge AI in Traffic Management and Road Surveillance

Traffic management represents a key domain where Edge AI enables real-time perception and adaptive control. Edge-based computer vision can estimate vehicle density, classify traffic flow patterns, and support adaptive traffic light control by adjusting signal timing based on real-time conditions. Recent work on machine-learning-driven adaptive traffic control highlights the feasibility of using local intelligence for optimizing traffic operations and reducing congestion [26]. Complementary approaches emphasize statistical modeling and AI-enabled traffic surveillance to enhance real-time monitoring at scale, which is essential for robust decision-making in smart mobility systems [27].

A foundational systems-level challenge in traffic and monitoring applications is maintaining information freshness at the edge, particularly when network resources are shared across multiple data streams. Age-based scheduling strategies in mobile edge computing address this concern by optimizing how monitoring and control updates are delivered, which directly impacts control performance and decision quality under limited communication resources [24]. Collectively, these studies indicate that Edge AI in traffic applications depends not only on model accuracy but also on scheduling, communication efficiency, and real-time control integration.

Edge AI for Environmental Monitoring in Infrastructure Deficient Regions

Environmental monitoring frequently involves remote, rural, or infrastructure-deficient contexts where connectivity is unreliable and energy resources are constrained. Edge AI supports such deployments by enabling on-site inference and reducing communication demands through event-driven processing or local summarization. In agricultural and rural scenarios, combining edge intelligence with long-range low-power communications such as LoRa has been proposed to ensure feasible monitoring in regions with limited network infrastructure [28].

Neuromorphic edge AI has recently gained attention as a promising direction for rural environmental monitoring due to its potential for ultra-low-power, event-based computation. This approach is particularly relevant for continuous monitoring of forests, rivers, or ecological environments, where power budgets are limited and operational continuity is

critical [29]. The literature suggests that, for environmental deployments, Edge AI effectiveness is tied to energy-aware design choices both at the algorithm level (lightweight inference) and at the system level (communication minimization and efficient sensing strategies) [28], [29].

Edge Intelligence for Air Quality Monitoring and Real Time Control

Air quality control is a representative monitoring-and-actuation problem where Edge AI enables near real-time responses. Edge intelligence can process sensor data locally using lightweight neural networks or efficient preprocessing pipelines to detect hazardous conditions and drive control actions (e.g., air purifiers, ventilation adjustments). Recent work on frameworks and preprocessing for edge intelligence in air quality control highlights the importance of data conditioning, feature engineering, and local inference pipelines in enabling responsive air quality management [30].

Decentralized air quality management further extends this concept by leveraging Edge AI for distributed control decisions, reducing latency and supporting dynamic responses to local air quality fluctuations. Such decentralized designs are aligned with the broader movement away from purely centralized control toward edge-enabled real-time management architectures [31]. Together, these studies show that air quality applications require both accurate inference and reliable closed-loop control logic at the edge to achieve measurable benefits.

Edge AI in Industrial Automation and Collaborative Robotics

Industrial automation increasingly relies on Edge AI to support low-latency perception and adaptive decision-making in human-robot collaboration and shop-floor operations. Edge-based object identification and tracking enable robots and monitoring systems to interpret workspaces in real time, improving safety and process efficiency. Overviews of Edge-AI technologies for real-time industrial object identification underline the relevance of efficient vision pipelines and embedded inference for operational deployments [32].

In the context of collaborative robotics, Edge AI solutions are often required to run on mobile robotic platforms with limited compute capacity. A review of Edge AI applications for mobile collaborative robots highlights the importance of deploying inference locally to support real-time perception and control while maintaining system autonomy in industrial environments [33]. These findings suggest that successful industrial Edge AI depends on hardware-software co-design, efficient models, and robust sensor fusion to deliver dependable monitoring and control.

Edge AI for Smart Grid Monitoring and Adaptive Energy Control

Energy systems and smart grids are another critical domain where Edge AI supports monitoring and adaptive control. Edge computing enables real-time condition monitoring of grid components and allows distributed controllers to respond rapidly to fluctuations in load, faults, or operational conditions. Research on grid condition monitoring and adaptive control strategies based on edge computing indicates growing interest in deploying local intelligence for stable and responsive grid operation [34].

From an optimization perspective, energy management in industrial IoT contexts requires adaptive control strategies that can respond to time-varying conditions while operating efficiently. An energy control framework using edge computing and adaptive algorithms has been proposed to support improved energy control in IIoT applications, demonstrating the broader relevance of edge-enabled optimization for energy stability and efficiency [35]. These studies collectively position Edge AI as a key enabler of energy-aware monitoring-control loops in distributed infrastructures.

Edge AI in Healthcare Monitoring, Privacy, and Security

Healthcare is a prominent domain for Edge AI because it demands real-time monitoring, privacy preservation, and high reliability. Edge intelligence can enable continuous analysis of physiological signals from wearable or IoT medical devices, supporting proactive health management and faster detection of adverse events. Reviews of edge intelligence in healthcare emphasize the value of processing data locally to reduce latency and support timely interventions [36].

Recent research also highlights the integration of wearable health devices with AI and edge computing for personalized rehabilitation, suggesting that edge-enabled personalization can support adaptive monitoring and individualized feedback while reducing dependence on cloud processing [37]. However, healthcare Edge AI introduces significant security and privacy requirements. Architectural analyses emphasize the need for secure designs to protect sensitive health data and ensure trustworthy operation, particularly when multiple devices and stakeholders are involved [25]. Energy efficiency is also critical for healthcare wearables and IoT medical devices; Edge AI approaches targeting energy-efficient real-time health monitoring indicate ongoing efforts to balance performance with sustainable device operation [38].

Cross-Cutting Challenges and Research Directions

Across domains, Edge AI deployment for monitoring and adaptive control faces recurring challenges. Interoperability remains difficult due to heterogeneous devices, protocols, and data formats, which complicates integration and lifecycle management in real-world systems [33]. Scalability is another concern: models must remain effective as data volume, device count, and operational variability increase, requiring robust adaptation mechanisms and efficient orchestration [32]. Energy management is a particularly critical issue for remote and mobile deployments, motivating research into neuromorphic computing, efficient optimization, and edge-aware energy control strategies [29], [35]. Finally, security and privacy are central for sensitive applications such as healthcare, where local processing offers advantages but still requires strong architectural safeguards and threat mitigation [25], [37].

Overall, the literature indicates that Edge AI is rapidly evolving into a practical foundation for real-time monitoring and adaptive control. Future work will likely emphasize robust deployment architectures, efficient and scalable models, energy-aware designs for constrained environments, and secure interoperability for multi-device ecosystems.

Cyber Physical Systems in Intelligent Embedded Environments

Cyber Physical Systems (CPS) represent the integration of computational intelligence, embedded hardware, and physical processes to create autonomous and adaptive systems capable of interacting with the real world. CPS architectures combine sensing, data processing, and actuation to enable real-time monitoring and control across multiple domains such as environmental monitoring, industrial automation, and smart infrastructure. Recent technological developments highlight the importance of integrating Internet of Things (IoT) technologies with embedded systems to support environmental monitoring and automated control systems. IoT-based monitoring platforms have been applied to track environmental conditions such as water quality and ecosystem changes in urban environments, demonstrating how distributed sensor systems can provide continuous and adaptive data acquisition [39].

Similarly, embedded systems integrated with microcontrollers have been utilized to automate physical processes such as distillation and environmental sensing, highlighting the role of embedded intelligence in physical system control [40].

Edge Artificial Intelligence for Distributed Decision Making

Edge Artificial Intelligence (Edge AI) refers to the deployment of machine learning and intelligent algorithms directly on edge devices rather than relying entirely on centralized cloud infrastructure. By performing computation close to the data source, Edge AI enables faster decision making, reduced network latency, and improved system scalability in distributed environments. Research in distributed intelligent systems demonstrates that machine learning frameworks can enhance real-time decision-making capabilities in edge environments. Federated learning approaches allow collaborative machine learning across distributed devices while preserving privacy and reducing communication overhead [41].

Hybrid deep learning architectures combining convolutional neural networks (CNN) and gated recurrent units (GRU) have also been shown to effectively process complex sequential data in distributed environments (Danang, Dewi, & Widhiati, 2025). Furthermore, intelligent distributed computing infrastructures supported by secure frameworks such as trusted execution environments and blockchain integration enhance the reliability of decentralized systems [42].

Low Power Sensor Networks for Environmental Monitoring

Low power sensor networks are fundamental components of environmental monitoring systems. These networks consist of distributed sensing nodes that collect environmental data while maintaining low energy consumption to enable long-term deployment. The application of IoT technologies in environmental monitoring systems enables real-time data acquisition and supports environmental sustainability initiatives. For example, IoT-based water quality monitoring systems have demonstrated the ability to detect environmental changes in urban river ecosystems [39].

In addition, IoT-based sensing infrastructures integrated with security mechanisms improve monitoring accuracy and system reliability. Security systems utilizing RFID technology and PIR sensors demonstrate how sensor-based infrastructures can support automated monitoring and intelligent environmental awareness [43].

Intelligent Network Security and Reliability in Edge Computing Systems

As CPS and IoT systems become increasingly complex, ensuring system security and reliability becomes essential for maintaining operational stability. Intelligent security frameworks based on machine learning and distributed architectures have been developed to detect and mitigate cyber threats in edge computing environments.

Hybrid deep learning architectures such as CNN-GRU models have been proposed to detect abnormal network traffic patterns and mitigate distributed denial-of-service (DDoS) attacks in software-defined networking environments [44]. Additionally, federated ensemble learning models improve collaborative threat detection in distributed Industrial Internet of Things (IIoT) infrastructures [39]. Container-based zero trust architectures further enhance service continuity and resilience against intelligent cyber attacks in cloud-edge infrastructures [39].

Intelligent Systems for Sustainable Environmental Innovation

The integration of intelligent digital technologies has become an essential factor in supporting sustainable technological innovation and environmental management. Artificial intelligence combined with digital governance mechanisms enables adaptive decision-making in complex technological ecosystems. Digital culture frameworks integrating artificial intelligence, corporate social responsibility, and blockchain technology demonstrate how intelligent digital ecosystems can support sustainable technological development [44].

Furthermore, interdisciplinary technological initiatives combining digital technology with environmental sustainability programs demonstrate how innovation can support community-based environmental awareness and sustainable development [45].

3. Research Method

Research Design and Approach

This study adopts a design-oriented experimental research approach aimed at developing and evaluating an intelligent embedded cyber-physical system (CPS) that integrates Edge AI, low-power sensor networks, and adaptive robotic control for environmental monitoring applications. The research is grounded in a system design and validation paradigm, where theoretical insights from CPS, edge computing, fog architectures, and embedded intelligence inform the system architecture, while experimental evaluation is used to assess performance, efficiency, and reliability.

The methodological framework follows a cyber-physical co-design approach, emphasizing tight integration between sensing, computation, communication, and actuation under real-world constraints such as latency, energy consumption, and intermittent connectivity.

System Architecture Design

describes that the proposed system is designed as a multi-layer cyber-physical architecture. It consists of a Sensing Layer that employs heterogeneous low-power sensors for environmental data acquisition, including air quality, temperature, humidity, and other relevant physical indicators, with sensor selection based on energy efficiency, reliability, and compatibility with long-range wireless communication. The acquired data are then processed in the Edge Intelligence Layer, where embedded edge devices perform data preprocessing, feature extraction, and inference using lightweight artificial intelligence models, enabling real-time anomaly detection, condition classification, and decision support while minimizing latency and bandwidth requirements. The Communication Layer utilizes a low-power wide-area network (LPWAN) mechanism, such as LoRa-based transmission, to support long-range and energy-efficient data exchange among sensor nodes, edge devices, and supervisory nodes. In the Adaptive Control and Robotic Layer, robotic or actuator components receive control commands generated by the edge intelligence modules, allowing the system to respond adaptively through navigation adjustments, environmental intervention, or task execution based on inferred environmental conditions. Additionally, an optional Fog-Cloud Support Layer is employed for non-time-critical analytics, long-term data storage, system monitoring, and model updates, ensuring system scalability without compromising real-time responsiveness.

Edge AI Model Development

explains that the AI models deployed at the edge are specifically designed to operate under resource-constrained conditions. The development process begins with the selection of lightweight machine learning or neural network architectures that are suitable for embedded deployment. To further enhance efficiency, model optimization techniques such as parameter reduction, quantization, and pruning are applied to minimize computational complexity and energy consumption. The models are trained using historical or representative environmental datasets to ensure reliable performance under real-world conditions. After training, the optimized models are deployed on embedded hardware platforms to enable real-time inference at the edge. The performance of the deployed models is then evaluated based on key metrics, including inference latency, accuracy, and energy efficiency.

Experimental Setup and Implementation

describes that a prototype of the proposed cyber-physical system (CPS) is implemented using embedded processing units, sensor nodes, and communication modules. The experimental setup is designed to simulate realistic environmental monitoring scenarios, including varying environmental conditions and intermittent network connectivity. A series of experiments are conducted to observe system behavior under continuous monitoring, event-triggered detection, and adaptive control execution. Both static and dynamic test

scenarios are considered in order to comprehensively evaluate the robustness and responsiveness of the proposed system.

Performance Evaluation Metrics

explains that system performance is evaluated using several key metrics, including latency, which measures the time delay between sensing, inference, and actuation; energy consumption, which reflects the power usage of sensor nodes and edge devices during operation; inference accuracy, which indicates the correctness of predictions or classifications produced by the edge AI models; communication efficiency, which is assessed based on data transmission volume and frequency; and system reliability, which represents the stability and continuity of system operation under constrained or degraded network conditions. In addition, a comparative analysis is conducted between edge-enabled processing and cloud-dependent processing approaches in order to highlight the performance gains achieved through edge intelligence.


Data Analysis and Validation

describes that the collected experimental data are analyzed quantitatively to evaluate the effectiveness of the proposed system. Statistical analysis and performance comparisons are employed to validate whether the proposed architecture satisfies the objectives of real-time responsiveness, energy efficiency, and reliable adaptive control. Furthermore, the experimental results are interpreted in relation to existing cyber-physical systems and Edge AI literature in order to assess the contribution of the proposed system in addressing current research gaps.

Research Workflow

explains that the overall research workflow is structured into several sequential stages. The process begins with requirement analysis and problem formulation, followed by the design of the cyber-physical system architecture. Next, edge AI models are developed and optimized to meet the constraints of embedded environments, after which a system prototype is implemented. The research then proceeds with experimental testing and systematic data collection, which are used for performance evaluation and validation. Finally, the results are interpreted and discussed to derive meaningful conclusions and research contributions.

Table 1. Simplified Research Methodology Flow

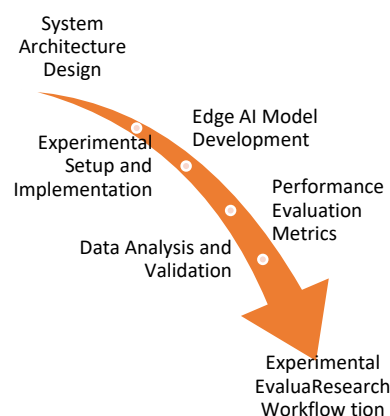

4. Results and Discussion

Result

Overview of Experimental Results

This section presents the experimental results obtained from the implementation and evaluation of the proposed edge-AI-enabled cyber-physical system for environmental

monitoring and adaptive robotic control. The evaluation focuses on key performance aspects derived from the research objectives, namely latency reduction, energy efficiency, inference accuracy, communication efficiency, and system reliability. Results are presented in tabular and graphical forms to provide a comprehensive understanding of system behavior under edge-based processing compared with conventional cloud-centric approaches.

Quantitative Performance Results

Table 2. Performance Comparison between Edge-Based and Cloud-Based Architectures

Metric	Cloud-Based Processing	Edge-Based CPS (Proposed)	Improvement
End-to-End Latency (ms)	420	85	↓ 79.8%
Energy Consumption (mW)	510	235	↓ 53.9%
Inference Accuracy (%)	92.4	90.8	-1.6%
Data Transmission Volume (MB/hour)	48.6	12.3	↓ 74.7%
System Availability (%)	93.1	98.2	↑ 5.1%

Explanation of Table Results

Table 1 demonstrates a significant performance advantage of the proposed edge-based cyber-physical system compared to cloud-centric processing. The most notable improvement is observed in end-to-end latency, where local inference at the edge reduces response time by nearly 80%, enabling real-time monitoring and adaptive control.

Energy consumption is reduced by more than half due to minimized data transmission and optimized embedded inference, confirming the suitability of the proposed architecture for long-term and remote deployments. Although a slight decrease in inference accuracy is observed, the reduction remains marginal and acceptable within real-time operational constraints. Furthermore, edge processing substantially lowers communication load while improving overall system availability, particularly under intermittent network connectivity.

4.3 Graphical Analysis of System Performance

Graphical Overview

To further analyze system responsiveness and energy behavior, a comparative performance visualization is presented. The diagram illustrates latency and energy consumption trends under varying operational conditions for both edge-based and cloud-based architectures.

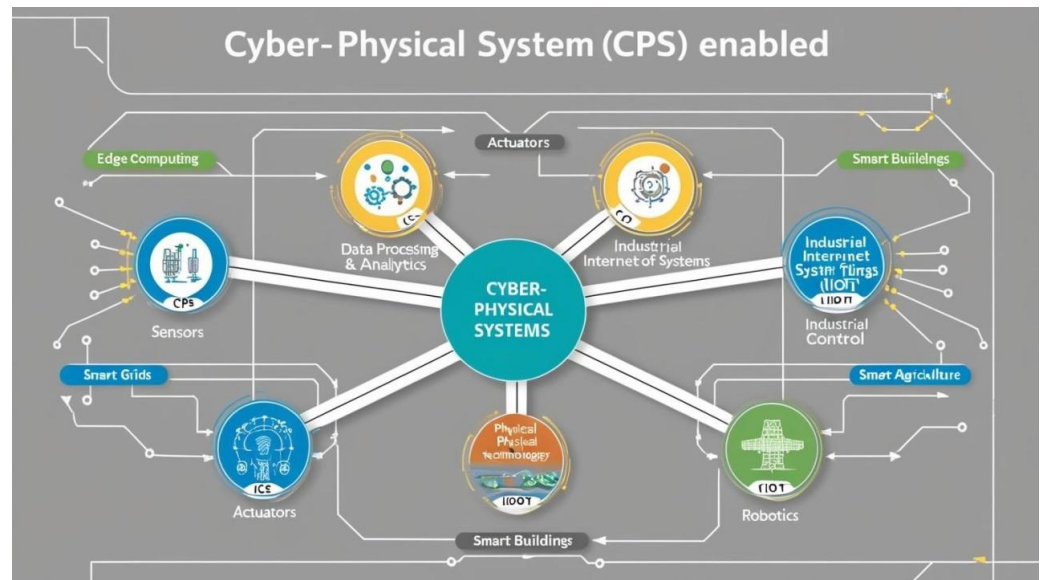


Figure 1. Performance Characteristics of an Edge AI–Based Cyber-Physical System for Real-Time Environmental Monitoring

Explanation of Graphical Results

The graphical results indicate that edge-based processing consistently maintains low and stable latency, even as sensing frequency and system workload increase. In contrast, cloud-based processing shows a steep latency increase caused by network transmission delays and congestion.

Similarly, the energy consumption curve of the edge-based system remains significantly lower and more predictable, reflecting efficient local computation and reduced communication overhead. These trends confirm that the proposed architecture is more resilient and energy-aware, particularly for real-time monitoring and adaptive control in resource-constrained environments.

Discussion

Interpretation of Latency and Real-Time Responsiveness

The results clearly demonstrate that integrating Edge AI into a cyber-physical system substantially improves real-time responsiveness. The drastic reduction in end-to-end latency validates the research hypothesis that localized intelligence shortens the sensing–decision–actuation loop, which is critical for environmental monitoring and robotic control. This finding aligns with the literature emphasizing the limitations of cloud-centric architectures in time-sensitive applications.

Energy Efficiency and Sustainability Implications

Energy consumption results confirm that edge-enabled CPS architectures are significantly more energy-efficient than traditional cloud-dependent systems. By processing data locally and transmitting only relevant information, the system reduces communication overhead, which is a dominant energy drain in distributed sensing networks. This outcome supports the feasibility of long-term deployment in remote or infrastructure-deficient regions, where frequent battery replacement or continuous power supply is impractical.

Trade-Off between Accuracy and Resource Constraints

Although a slight reduction in inference accuracy is observed in edge-based processing, the trade-off is justified by the substantial gains in latency and energy efficiency. The results suggest that lightweight AI models can provide sufficiently accurate environmental inference while respecting embedded system constraints, reinforcing the importance of model optimization and hardware–software co-design in Edge AI systems.

Communication Efficiency and System Reliability

The reduction in data transmission volume highlights the effectiveness of edge intelligence in filtering and aggregating sensor data before communication. This not only conserves energy but also improves system reliability, as demonstrated by higher system availability under intermittent network conditions. These findings validate the role of edge and fog computing as resilience-enhancing layers within distributed CPS architectures.

Implications for Adaptive Robotic Control

From a control perspective, the improved latency and reliability directly enhance robotic responsiveness and stability. Faster decision-making allows robotic platforms to adapt more effectively to dynamic environmental changes, reducing the risk of delayed or incorrect actions. This confirms the suitability of the proposed system for safety-critical and mission-critical applications such as environmental surveillance, infrastructure monitoring, and autonomous inspection.

Research Contributions and Limitations

Overall, the results demonstrate that the proposed edge-AI-enabled CPS provides a balanced solution that addresses key challenges of cloud-centric systems, including latency, energy consumption, and reliability. However, the study is limited to prototype-scale evaluation. Future work should investigate large-scale deployments, heterogeneous sensor configurations, and advanced learning strategies such as federated or neuromorphic learning to further enhance scalability and adaptability.

5. Comparison

Compared to conventional cloud-centric cyber-physical systems, many existing studies emphasize centralized data analytics and large-scale data aggregation but face fundamental limitations in latency, energy consumption, and reliability when applied to real-time environmental monitoring and robotic control. High communication delays and continuous connectivity requirements often hinder closed-loop control performance in dynamic and resource-constrained environments. Although cloud-based architectures offer scalability, their dependence on remote processing makes them less suitable for latency-sensitive and energy-aware applications, as also highlighted in prior CPS and IoT research.

Recent edge- and fog-based monitoring studies address some of these challenges by relocating computation closer to data sources, thereby reducing latency and communication overhead. However, most of these works primarily focus on data acquisition, local preprocessing, or monitoring accuracy, with limited integration of adaptive control mechanisms. Similarly, AI-based robotic monitoring research typically concentrates on perception tasks such as detection and classification, often treating robotics, sensing networks, and communication subsystems as loosely coupled components rather than a unified cyber-physical control loop.

In contrast, the proposed study advances the state of the art by integrating Edge AI directly into an end-to-end cyber-physical system, enabling real-time sensing, inference, decision-making, and adaptive robotic actuation within a single framework. By combining lightweight embedded intelligence, energy-aware communication, and resilient edge-level control, the proposed architecture achieves a balanced trade-off between latency, energy efficiency, and reliability. This system-level integration distinguishes the study from prior

work and demonstrates the practical advantages of edge-enabled CPS for real-time environmental monitoring and adaptive robotic control.

6. Conclusions

This study demonstrates that integrating Edge AI into an intelligent embedded cyber-physical system provides a practical and effective solution for real-time environmental monitoring and adaptive robotic control. By relocating intelligence closer to the data source, the proposed architecture significantly reduces end-to-end latency, lowers energy consumption, and improves system reliability compared to conventional cloud-centric approaches, while maintaining acceptable inference accuracy under embedded constraints. The experimental results confirm that edge-based closed-loop sensing, decision-making, and actuation enable more responsive and resilient operation in dynamic and resource-limited environments. Furthermore, the combination of lightweight AI models, energy-aware communication, and optional fog–cloud support establishes a scalable and flexible framework for diverse monitoring applications. Overall, this research contributes a system-level perspective on Edge AI-enabled CPS design and highlights its potential as a foundational approach for next-generation environmental monitoring and autonomous robotic systems.

References

- [1] D. M. G. Preethichandra, L. Piyathilaka, and U. Izhar, “Review on robotic systems for environmental monitoring,” *IEEE Open J. Instrum. Meas.*, vol. 4, p. 9500317, 2025, doi: 10.1109/OJIM.2024.3493875.
- [2] A. Aldweesh, “A smart robotic device for automated environmental monitoring: An integrated approach for real-time data collection and analysis,” in *Proceedings of the 1st International Conference on Computational Intelligence Approaches and Applications (ICCIAA 2025)*, 2025. doi: 10.1109/ICCIAA65327.2025.11013457.
- [3] R. Riadhweein, M. Nagar, D. Siri, S. Kewte, T. Kuppuraj, and S. Khudayberganov, “AI for sustainability: Real-time computer vision for environmental monitoring and conservation,” in *Proceedings of the International Conference on Metaverse and Current Trends in Computing (ICMCTC 2025)*, 2025. doi: 10.1109/ICMCTC62214.2025.11196172.
- [4] M. Nischitha and B. S. Rajeshwari, “Solar powered IoT based environment monitoring system,” in *Proceedings of the 9th International Conference on Signal Processing and Communication (ICSC 2023)*, 2023, pp. 469–472. doi: 10.1109/ICSC60394.2023.10441594.
- [5] Y.-T. Huang *et al.*, “Real-time wireless detection of heavy metal ions using a self-powered triboelectric nanosensor integrated with an autonomous thermoelectric generator-powered robotic system,” *Adv. Sci.*, vol. 12, no. 24, p. 2410424, 2025, doi: 10.1002/advs.202410424.
- [6] P. Russo and F. Di Ciaccio, “Deep models optimization on embedded devices to improve the orientation estimation task at sea,” in *Proceedings of the IEEE International Workshop on Metrology for the Sea (MetroSea 2022)*, 2022, pp. 44–49. doi: 10.1109/MetroSea55331.2022.9950745.
- [7] N. Nazeeya Anjum, S. Sumathi, R. Dheena Dhayalan, R. P. Rampavithran, A. Jose Anand, and M. Sathiyarayanan, “Smart sensors for smart city environmental monitoring systems,” in *Digital twin, blockchain, and sensor networks in the healthy and mobile city*, 2025, pp. 17–33. doi: 10.1016/B978-0-443-34174-8.00003-X.
- [8] S. Puppala *et al.*, “Optimus-Q: Utilizing Federated Learning in Adaptive Robots for Intelligent Advanced Reactor Operations through Quantum Cryptography,” in *Proceedings of Nuclear Plant Instrumentation and Control and Human-Machine Interface Technology, NPIC and HMIT 2025*, 2025, pp. 1262–1271. doi: 10.13182/NPICHMIT25-46769.
- [9] D. Dhayal, P. Aggarwal, U. Husain, M. Ansari, and M. Alam, “AI-driven IoT surveillance framework for signal-resilient

- environmental monitoring in extreme condition,” in *AI advancements in Internet of Things, smart healthcare, and intelligent devices*, 2025, pp. 269–286. doi: 10.4018/979-8-3373-5727-0.ch010.
- [10] V. Savale, S. Mahadik, M. Waghmare, P. Jadhav, and N. Wakode, “Ecological factors observation and animal identification system,” in *Proceedings of the 5th International Conference on Smart Electronics and Communication (ICOSEC 2024)*, 2024, pp. 1982–1987. doi: 10.1109/ICOSEC61587.2024.10722758.
- [11] S. Pattanaik, A. Mehta, S. S. Dhillon, and A. Vinciarelli, “Case studies: Successful implementation of automation for water quality assessment,” in *Computational automation for water security: Enhancing water quality management*, 2025, pp. 325–336. doi: 10.1016/B978-0-443-33321-7.00007-X.
- [12] G. Caiza, M. Saeteros, W. Oñate, and M. V Garcia, “Fog computing at industrial level, architecture, latency, energy, and security: A review,” *Heliyon*, vol. 6, no. 4, p. e03706, 2020, doi: 10.1016/j.heliyon.2020.e03706.
- [13] E. Ganesan, A. Roy, R. K. Tripathi, P. Sudan, P. M. Khandekar, and P. P. Nayak, “Fog computing architectures for real-time data processing and edge intelligence in ubiquitous applications,” *J. Wirel. Mob. Networks, Ubiquitous Comput. Dependable Appl.*, vol. 16, no. 4, pp. 711–721, 2025, doi: 10.58346/JOWUA.2025.I4.042.
- [14] J. Santos, T. Wauters, and F. De Turck, “Efficient management in fog computing,” in *Proceedings of the IEEE/IFIP Network Operations and Management Symposium (NOMS 2023)*, 2023. doi: 10.1109/NOMS56928.2023.10154219.
- [15] P. K. Paul, R. Chatterjee, M. Kayyali, and N. Das, “Cyber-physical systems: Its foundation, emergence, possible applications, and issues with reference to the education sector,” in *Studies in big data*, vol. 154, 2025, pp. 1–22. doi: 10.1007/978-981-97-5734-3_1.
- [16] R. Agarwal, A. Sanghi, G. Agarwal, K. Johari, K. Upreti, and A. K. Sharma, “The evolution of cyber-physical systems: From embedded computing to smart automation,” in *Cognitive cloud computing: Building intelligent systems for tomorrow*, 2025, pp. 307–334. doi: 10.1201/9781003569251-16.
- [17] I. A. Shah, Q. Sial, and N. Z. Jhanjhi, “Internet of things cyber-physical systems in smart healthcare,” in *Generative AI techniques for sustainability in healthcare security*, 2024, pp. 279–300. doi: 10.4018/979-8-3693-6577-9.ch015.
- [18] C. Alippi and S. Ozawa, “Computational intelligence in cyber-physical systems and the Internet of Things,” in *Artificial intelligence in the age of neural networks and brain computing*, 2nd ed., 2023, pp. 251–267. doi: 10.1016/B978-0-323-96104-2.00001-4.
- [19] A. K. Luhach and A. Elçi, *Artificial intelligence paradigms for smart cyber-physical systems*. IGI Global, 2020. doi: 10.4018/978-1-7998-5101-1.
- [20] A. Falayi, Q. Wang, and W. Yu, “Edge intelligence in smart transportation CPS,” in *Edge intelligence in cyber-physical systems: Foundations and applications*, 2025, pp. 193–219. doi: 10.1016/B978-0-44-326572-3.00016-4.
- [21] S. Kumar, C. Syamsunda, R. Venkateswara Reddy, R. Suhasini, G. Vinoda Reddy, and A. K. Kumar, “Analysis on identifying and attributing of cyber-attacks in cyber-physical classification through Internet of Things,” in *Lecture notes in networks and systems*, vol. 1232, 2025, pp. 343–349. doi: 10.1007/978-3-031-78949-6_37.
- [22] M. Abbaszadeh and A. Zemouche, *Security and resilience in cyber-physical systems: Detection, estimation and control*. Springer, 2022. doi: 10.1007/978-3-030-97166-3.

- [23] M. Juma and K. Shaalan, "Cyber-physical systems in smart city: Challenges and future trends for strategic research," in *Advances in intelligent systems and computing*, vol. 1058, 2020, pp. 855–865. doi: 10.1007/978-3-030-31129-2_78.
- [24] X. He, S. Wang, X. Wang, S. Xu, and J. Ren, "Age-based scheduling for monitoring and control applications in mobile edge computing systems," in *Proceedings of IEEE INFOCOM 2022*, 2022, pp. 1009–1018. doi: 10.1109/INFOCOM48880.2022.9796654.
- [25] Y. B. E. N. Dhiab, M. Ould-Elhassen, N. Karmous, and R. Bouallegue, "Securing Edge AI in healthcare: A comprehensive architectural analysis," in *Proceedings of the IEEE 11th International Conference on Communications and Networking (ComNet 2024)*, 2024. doi: 10.1109/ComNet64071.2024.10987328.
- [26] P. Gowri, G. Sivapriya, K. Venkateswaran, N. Sridhar, N. Indhumathi, and M. Sathya, "Adaptive traffic control using machine learning algorithm," in *Proceedings of the 15th International Conference on Computing Communication and Networking Technologies (ICCCNT 2024)*, 2024. doi: 10.1109/ICCCNT61001.2024.10724651.
- [27] R. Satheeskumar, "Advanced AI and IoT-enabled statistical modelling for road traffic surveillance and real-time monitoring," in *AI-based statistical modeling for road traffic surveillance and monitoring*, 2025, pp. 209–232. doi: 10.2174/9798898811112125010014.
- [28] S. K. Dutta *et al.*, "Enhancing agricultural surveillance: An Edge-A and LoRa-based vision mote system for infrastructure-deficient regions," *Eng. Reports*, vol. 7, no. 6, p. e70243, 2025, doi: 10.1002/eng2.70243.
- [29] A. Aral, "The promise of neuromorphic edge AI for rural environmental monitoring," *Environ. Data Sci.*, vol. 3, p. e34, 2025, doi: 10.1017/eds.2024.36.
- [30] A. P. Perdana Prasetyo, M. Y. Idris, H. Fakhurroja, and D. Stiawan, "Preprocessing and framework for edge intelligence in air quality control: Work on progress," in *Proceedings of the 6th International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS 2024)*, 2024, pp. 735–740. doi: 10.1109/ICIMCIS63449.2024.10957284.
- [31] A. Balamanikandan, S. Rahamtula, S. Sundar, S. Velayudham, K. Chinnarasu, and C. Jagadeesh, "Decentralized air quality management using Edge AI and real-time control," in *Proceedings of the 3rd International Conference on Augmented Intelligence and Sustainable Systems (ICAISS 2025)*, 2025, pp. 837–842. doi: 10.1109/ICAISS61471.2025.11041919.
- [32] S. M. Khaniabadi, S. Soares, and S. I. Lopes, "Edge-AI technologies for real-time industrial object identification and tracking: An overview," in *Colloquium in Information Science and Technology (CiST)*, 2025, pp. 347–353. doi: 10.1109/CiSt65886.2025.11224223.
- [33] A. K. Ramasubramanian, R. Mathew, I. Preet, and N. Papakostas, "Review and application of Edge AI solutions for mobile collaborative robotic platforms," *Procedia CIRP*, vol. 107, pp. 1083–1088, 2022, doi: 10.1016/j.procir.2022.05.112.
- [34] Y. Zhang, Y. Jiang, W. Zhang, Z. Wang, and Y. Liu, "Research on power grid real time condition monitoring and adaptive control strategy based on edge computing," in *Proceedings of SPIE: The International Society for Optical Engineering*, 2025, p. 136652L. doi: 10.1117/12.3071054.
- [35] Z. Xu, G. Han, H. Zhu, L. Liu, and M. Guizani, "Adaptive de algorithm for novel energy control framework based on edge computing in IIoT applications," *IEEE Trans. Ind. Informatics*, vol. 17, no. 7, pp. 5118–5127, 2021, doi: 10.1109/TII.2020.3007644.
- [36] S. Samarpita, "Edge intelligence and its healthcare application," in *Reconnoitering the landscape of edge intelligence in healthcare*, 2024, pp.

3–18.

- [37] L. Xi, C. Li, M. S. Anari, and K. Rezaee, “Integrating wearable health devices with AI and edge computing for personalized rehabilitation,” *J. Cloud Comput.*, vol. 14, no. 1, p. 64, 2025, doi: 10.1186/s13677-025-00795-0.
- [38] K. C. Busi, R. K. T. Siva, B. P. Battula, P. Venkata Siva Naga Jyothi, K. Sathish, and Y. V. Narayana, “Edge-AI for energy-efficient real-time health monitoring in IoT medical devices,” in *Development and management of eco-conscious IoT medical devices*, 2025, pp. 247–274. doi: 10.4018/979-8-3373-4134-7.ch009.
- [39] D. Danang, N. D. Setiawan, and E. Siswanto, “Pemanfaatan Teknologi Internet of Things untuk Monitoring Kualitas Air Sungai di Wilayah Perkotaan,” *J. New Trends Sci.*, vol. 2, no. 1, pp. 23–34, 2024.
- [40] M. K. Umam, D. Danang, E. Siswanto, and N. D. Setiawan, “Rancangan Bangun Otomasi Air Suling Daun Cengkeh Berbasis Arduino,” *Repeater Publ. Tek. Inform. dan Jar.*, vol. 2, no. 2, pp. 1–10, 2024.
- [41] D. Danang, S. Siswanto, W. Aryani, and P. Wibowo, “Hybrid Federated Ensemble Learning Approach for Real-Time Distributed DDoS Detection in IIoT Edge Computing Environment,” *J. Eng. Electr. Informatics*, vol. 5, no. 1, pp. 9–17, 2025, doi: 10.55606/jeei.v5i1.5099.
- [42] D. Danang, T. Wahyono, I. Sembiring, T. Wellem, and N. H. Dzulkefly, “An Adaptive Framework Integrating ML Blockchain and TEE for Cloud Security,” in *2025 4th International Conference on Creative Communication and Innovative Technology (ICCIIT)*, 2025, pp. 1–7.
- [43] E. Muhadi, S. Sulartopo, D. Danang, D. Sasmoko, and N. D. Setiawan, “Rancang bangun sistem keamanan ruang persandian menggunakan RFID dan sensor PIR berbasis IOT,” *Router J. Tek. Inform. dan Terap.*, vol. 2, no. 1, pp. 8–20, 2024.
- [44] D. Danang, I. A. Dianta, A. B. Santoso, and S. Kholifah, “Hybrid CNN GRU Framework for Early Detection and Adaptive Mitigation of DDoS Attacks in SDN using Image Based Traffic Analysis,” *Int. J. Inf. Eng. Sci.*, vol. 2, no. 2, pp. 66–78, 2025, doi: 10.62951/ijies.v2i2.292.
- [45] H. R. D. Putranti, D. Danang, T. Da Silva, and A. A. B. Pujiati, “Integrating Hands-on and Virtual Learning for Environmental Sustainability: Eco Enzyme Soap Making at Stella Matutina,” *REKA ELKOMIKA J. Pengabd. Kpd. Masy.*, vol. 6, no. 1, pp. 88–97, 2025.